


WIRING SCHEMATIC FOR SINGLE LAMP INSTALLATION

APPLICABLE TO PART NUMBERS: PAR36L201 & PAR36TR1

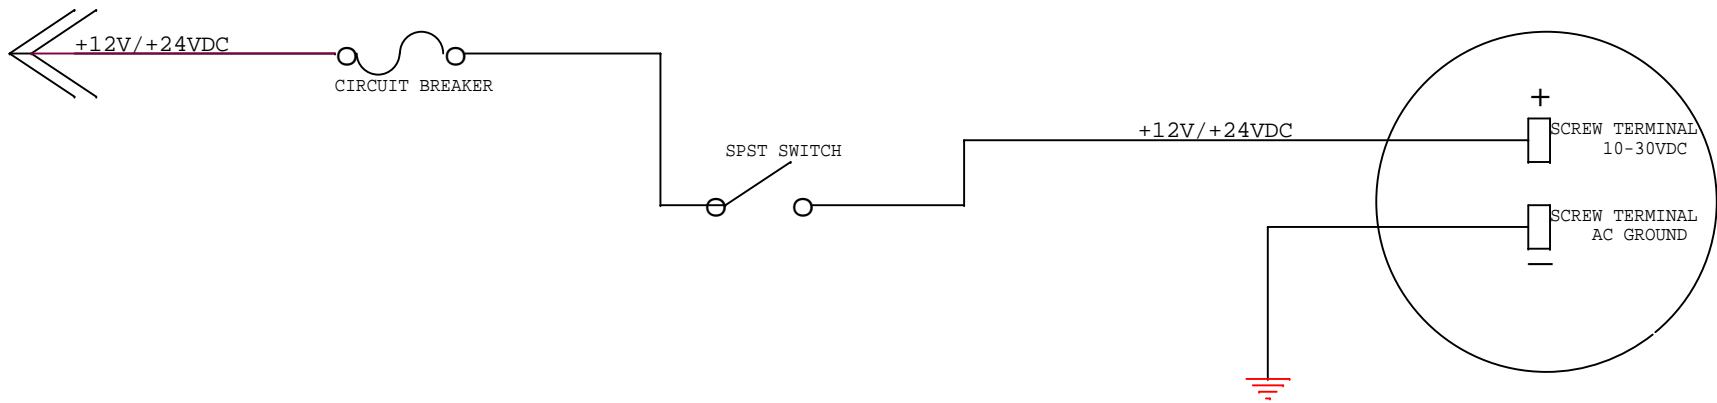

- NOTES:
1. If installing light assembly as a drop-in replacement to an existing PAR36 halogen lamp, use existing circuit components ONLY after verifying compatibility with reference to FAA AC 43-13B, Chapter 11
 2. For new installation where wiring is added, both power and ground wire shall be 20AWG stranded single conductor, meeting MIL-W-22759/16 specifications. Power should be supplied through one 5-amp 7277-2-5 circuit breaker or one W31X2M1G5 circuit breaker switch.

Title		
Aero-Lites LED Landing Light Wiring Schematic - ONE LIGHT		
Size	Document Number	Rev
A	WS-0001	A
Date:	Sunday, July 03, 2016	Sheet 1 of 1